

Integration Solar Street Light

Product Specification

Product Picture:



Features:

- * Aluminum extrusion lamp body
- * No ac power cables, no electricity charges
- * LED lumen 160lm/w
- * IP65 rating


Applications:

- * Plazas, courtyards
- * Rural road lighting
- * Gardens, parks
- * Sporting venues

Product Parameter:

Model	A1-Li-120W	A1-Li-180W	A1-Li-240W
LED Type	30PCS 3000K+30PCS 6000K 5730LED	45PCS 3000K+45PCS 6000K 5730LED	60PCS 3000K+60PCS 6000K 5730LED
Battery Type	LiFePO4 6.4V 18AH	LiFePO4 6.4V 24AH	LiFePO4 6.4V 30AH
Solar Panel Type	Polycrystalline 22W 10V	Polycrystalline 28W 10V	Polycrystalline 39W 10V
LED Lumen	160lm/w		
Color Temperature	3000K-6500K		
LED Lifespan	50000H		
Sensing Method	PIR Detection		
Operating Temperature	-20°C~60°C		
Storage Temperature	-30°C~70°C		
Gross weight/Carton	17kg	22kg	24kg
Product Size	702*220*123mm	902*220*123mm	1117*220*123mm
Package Size	850*325*280mm 3Pcs/Box	1050*325*280mm 3Pcs/Box	1270*325*280mm 3Pcs/Box
Warranty Time	3 Years		

Lighting Data:

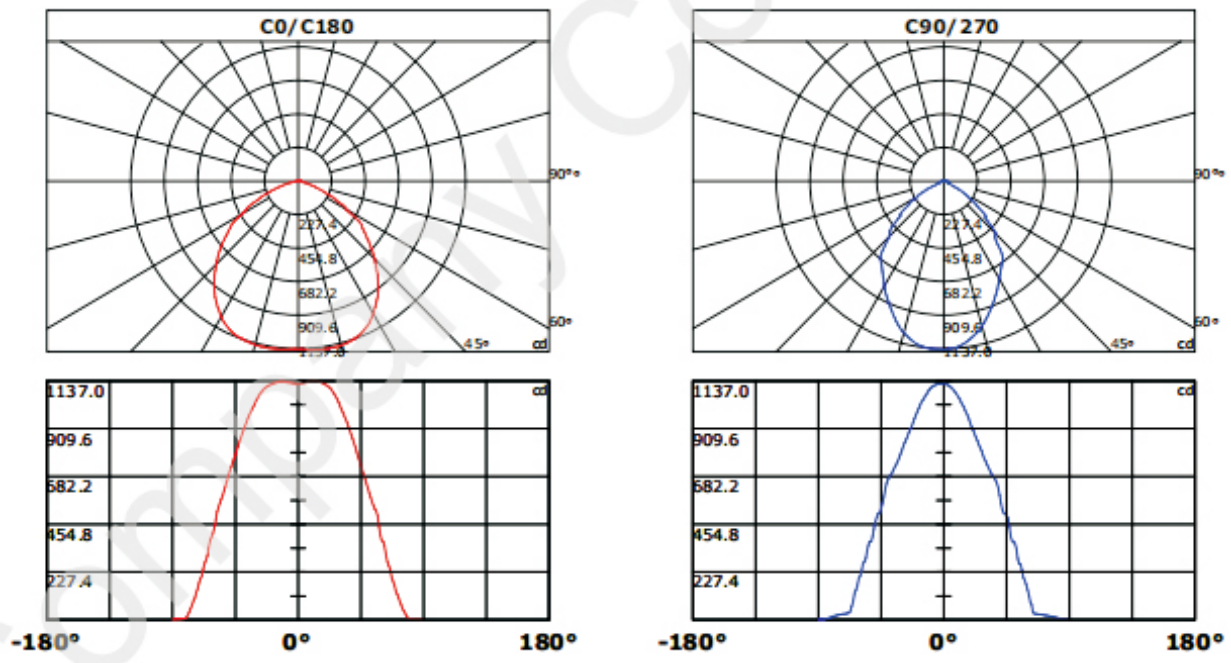

Installation Dimension:

(Unit:mm)

