

Integration Solar Street Light

Product Specification

Product Picture:



Features:

- * Die-casting aluminium lamp body
- * No ac power cables, no electricity charges
- * LED lumen 160lm/w
- * IP65 rating


Applications:

- * Plazas, courtyards
- * Factories, warehouses
- * Gardens, parks
- * Sporting venues

Product Parameter:

Model	A2-Li-100W	A2-Li-200W	A2-Li-300W
LED Type	142PCS 5730LED	398PCS 5730LED	600PCS 5730LED
Battery Type	LiFePO4 3.2V 18AH	LiFePO4 3.2V 36AH	LiFePO4 3.2V 48AH
Solar Panel Type	Polycrystalline 20W 5V	Polycrystalline 26W 5V	Polycrystalline 40W 5V
Color Temperature	3000K-6500K		
LED Lifespan	50000H		
Control Method	Permanent bright		
Operating Temperature	-20°C~ 60°C		
Storage Temperature	-30°C~ 70°C		
Gross weight/Carton	17kg	13kg	15kg
Product Size	495*210*65mm	495*210*90mm	495*210*90mm
Lamp Body Outer Box Size	370*370*545mm 3Pcs/Box	370*335*545mm 2Pcs/Box	370*335*590mm 2Pcs/Box
Warranty Time	3 Years		

Lighting Data:

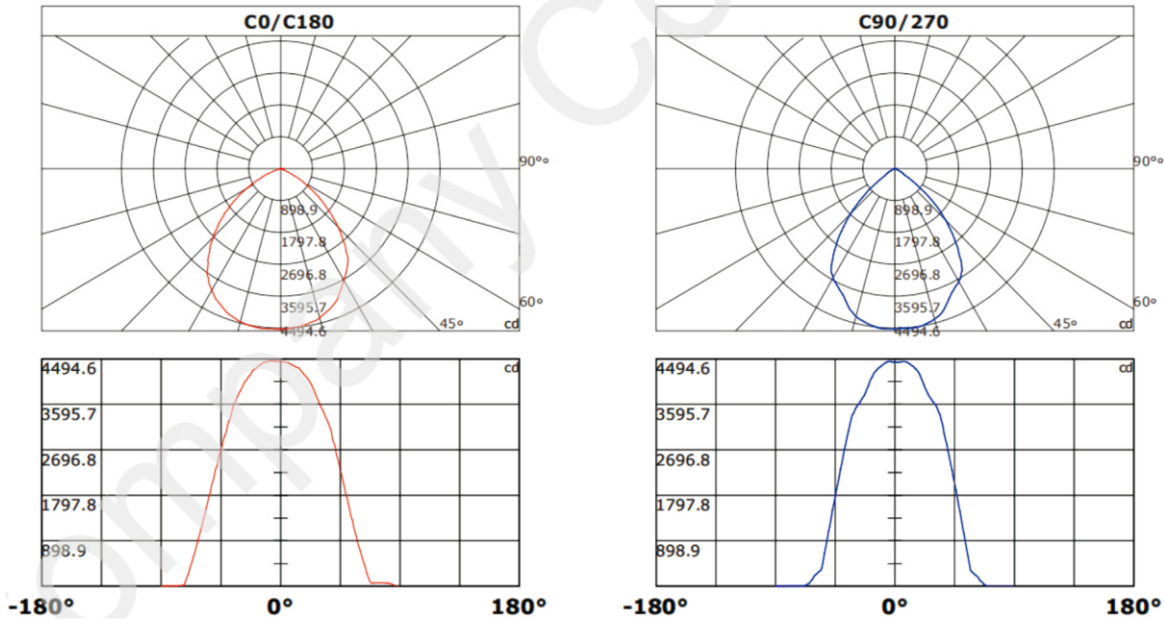

Installation Dimension:

